




Thyristor-Thyristor Module

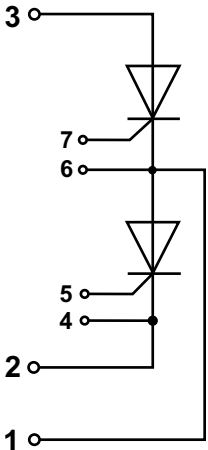

Type	V_{RSM}	V_{RRM} , V_{DRM}
SMTT-70I-08	900	800
SMTT-70I-12	1300	1200
SMTT-70I-14	1500	1400
SMTT-70I-16	1700	1600
SMTT-70I-18	1900	1800
SMTT-70I-20	2100	2000
SMTT-70I-22	2300	2200
SMTT-70I-24	2500	2400

Type	I_{TAVM}	I_{TRMS}	T_c	I_{TSM}	$(di/dt)_{cr}$	$(dv/dt)_{cr}$	V_{TM}	I_{TM}	V_{TO}	r_T	t_q	V_{GT}	I_{GT}	T_{VJM}	V_{isol}	R_{thJC}
	A	A	°C	kA	A/μs	V/μs	V	A	V	mΩ	μs	V	mA	°C	V	K/W
SMTT-70I	70	180	85	1.6	150	1000	1.65	320	0.85	3.2	150	1.5	100	125	3600	0.3

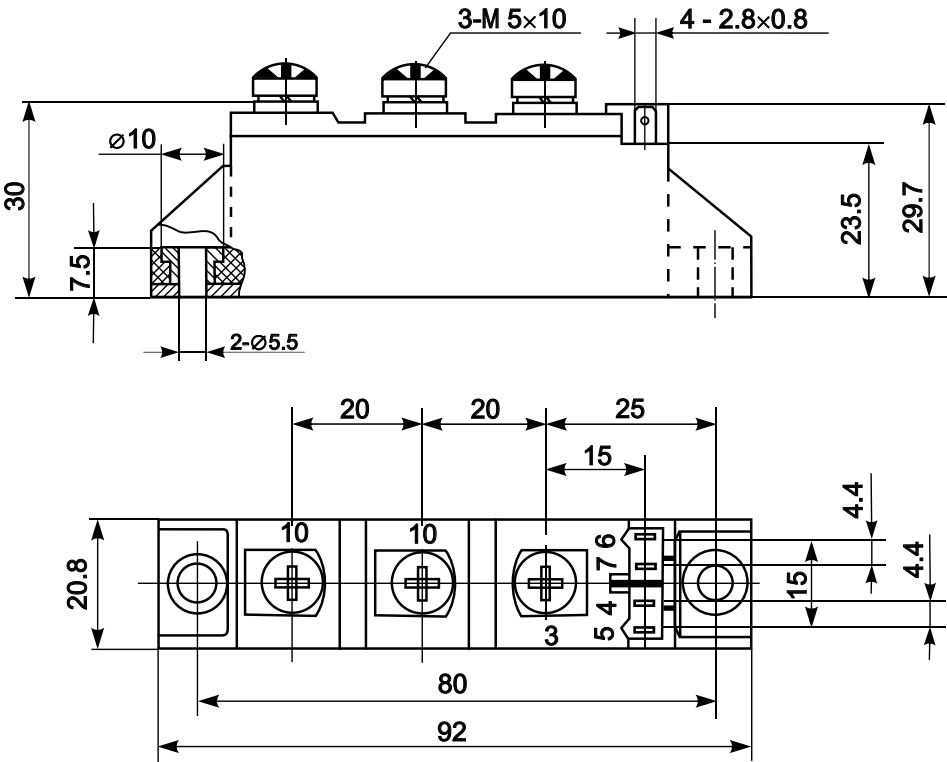

- Features:
- Industrial standard package
 - Heat transfer through aluminium nitride ceramic isolated metal baseplate
 - Precise internal pressure contacts for high reliability
 - 3600V RMS isolation voltage

- Typical Applications:
- DC motor control
 - AC motor soft starter
 - Temperature control (e.g. for ovens, chemical processes)
 - Lighting control